



ENGINE

Model	Isuzu 6SD1TPD
Type	4-cycle water-cooled, direct injection
Aspiration	Turbocharged
No. of cylinders	6
Rated flywheel	162 kW (220 PS) at 2 000 rpm
horsepower (DIN 6271, net)	
Rated flywheel	155 kW (208 HP) at 2 000 rpm
horsepower (SAE J1349, net)	
Maximum torque	834 N.m (85 kgf.m, 615 lbf.ft)
	at 1400 rpm
Piston displacement	9.84 l (600 cu in)
Bore and stroke	120 mm x 145 mm (4.7" x 5.7")
Batteries	2 x 12V, 160 AH
Governor	Mechanical, all-speed by stepping motor



HYDRAULIC SYSTEM

Hitachi's New ETS (Electronic Total control System) can achieve maximum job efficiency and reduce fuel consumption/noise.

Main pumps	2 variable displacement axial piston pumps
Maximum oil flow	2 x 273 l/min (72.1 US gpm, 60.1 Imp gpm)
Pilot pump	Gear pump
Maximum oil flow	33.6 l/min (8.9 US gpm, 7.4 Imp gpm)

Hydraulic Motors

Travel	2 x Axial piston motor with parking brake
Swing	1 x Axial piston motor

Relief Valve Settings

Implement circuit	29.4 MPa (300 kgf/cm ² , 4 270 psi)
Swing circuit	26.4 MPa (270 kgf/cm ² , 3 840 psi)
Travel circuit	34.3 MPa (350 kgf/cm ² , 4 980 psi)
Pilot circuit	3.9 MPa (40 kgf/cm ² , 570 psi)

Hydraulic Cylinders

High-strength piston rods and tubes are used. Cylinder cushion mechanisms are provided for all cylinders to absorb shock when pistons reach their stroke ends.

Dimensions

	Quan.	Bore	Rod diameter
Boom	2	145 mm (5.71")	100 mm (3.94")
Arm	1	165 mm (6.50")	110 mm (4.33")
Bucket	1	145 mm (5.71")	95 mm (3.74")

Hydraulic Filters

All hydraulic circuits have high-quality hydraulic filters for protection against oil contamination and longer life of hydraulic components. A suction filter is built in suction line, and a 10 µm full-flow filters in return circuit and swing/travel motor drain lines.



CONTROLS

Pilot controls for all functions. Hitachi original shockless valve, and quick warm-up system are built in the pilot circuit for easy, precise, fatigue-free operation. Multi rotary pilot control valve is optionally available for simple selection of control lever direction.

2 x Implement levers

2 x Travel levers with pedals



UPPERSTRUCTURE

Revolving Frame

Welded high-strength box construction, using heavy-gauge steel plates for high ruggedness. Reinforced D-section frame featuring high resistance to deformation.

Swing Mechanism

High-torque, axial piston motor with planetary reduction gear is bathed in oil. Swing circle is single-row, shear-type ball bearing with induction-hardened internal gear. Internal gear and pinion gear are immersed in lubricant. Swing parking brake is spring-set/hydraulic-released disc type. Swing cushion valve built in swing motor absorbs shocks when stopping swing, ensuring smooth stops.

Swing speed 12.0 min⁻¹ (12.0 rpm)

Operator's Cab

Independent roomy cab, 940 mm (37") wide by 1 645 mm (65") high, conforming to ISO* Standards. Reinforced glass windows on all 4 sides for all-round visibility. Front windows (upper and lower), fully openable, is storable in the cab. Fully adjustable reclining seat with armrests; movable with or without control levers and monitor panel.

* International Standard Organization



UNDERCARRIAGE

Tracks

Tractor-type undercarriage. Heavy-duty track frame of all welded structure. Top-grade materials employed for heavy-duty operation. Side frames are rigidly welded to the track frame. Lifetime-lubricated track rollers, idlers, and sprockets with floating seals. Track shoes with triple grousers made of induction-hardened rolled alloy. Flat and triangular shoes also available. Specially heat-treated connecting pins with dirt seals. Hydraulic (grease) track adjusters with shock-absorbing recoil springs.

Number of Rollers and Shoes on Each Side

Upper rollers	2
Lower rollers	8: EX300-2/EX300H-2 9: EX300LC-2/EX300LCH-2
Track shoes	47: EX300-2/EX300H-2 50: EX300LC-2/EX300LCH-2
Track guard	1

Reinforced track guard is provided on the EX300H-2 and EX300LCH-2.

Traction Device

Each track driven by a high-torque, axial piston motor through planetary reduction gears, allowing counter-rotation of the tracks. Sprockets are easily replaceable. Parking brake is spring-set/hydraulic-released disc type.

Travel speeds	High: 0 to 4.2 km/h (2.6 mph)
	Medium: 0 to 3.3 km/h (2.0 mph)
	Low: 0 to 2.6 km/h (1.6 mph)

Maximum traction force 216 kN (22 000 kgf, 48 500 lbf)

Gradeability 35° (70%) continuous

WEIGHTS AND GROUND PRESSURE

EX300-2/EX300LC-2:

Equipped with 6.40 m (21'0") boom, 3.20 m (10'6") arm, and 1.38 m³ (1.80 cu yd; PCSA heaped) bucket

Shoe type	Shoe width	Operating weight	Ground pressure
Triple grouser	600 mm (24")	28 600 kg (63 100 lb)	58.8 kPa (0.60 kgf/cm², 8.53 psi)
		29 300 kg (64 600 lb)	54.9 kPa (0.56 kgf/cm², 7.96 psi)
	800 mm (31")	29 500 kg (65 000 lb)	45.1 kPa (0.46 kgf/cm², 6.54 psi)
		30 200 kg (66 600 lb)	42.2 kPa (0.43 kgf/cm², 6.11 psi)
Flat type	600 mm (24")	29 700 kg (65 500 lb)	60.8 kPa (0.62 kgf/cm², 8.82 psi)
		30 500 kg (67 300 lb)	56.9 kPa (0.58 kgf/cm², 8.25 psi)
Triangular type	910 mm (36")	30 000 kg (66 200 lb)	41.2 kPa (0.42 kgf/cm², 5.97 psi)
		30 800 kg (67 900 lb)	38.2 kPa (0.39 kgf/cm², 5.55 psi)

Figures in are data on the EX300LC-2.

Note: Depending on the jobsite conditions, 800 mm (31") Grouser shoe, 600 mm (24") Flat type shoe and 910 mm (36") Triangular type shoe may not be recommended for rock, hard surface or forestry applications.

EX300H-2/EX300LCH-2:

Equipped with 6.40 m (21'0") H-boom, 3.20 m (10'6") H-arm, and 1.38 m³ (1.80 cu yd; PCSA heaped) rock bucket.

	Shoe width	Operating weight	Ground pressure
EX300H-2	Triple grouser 600 mm (24")	29 300 kg (64 600 lb)	59.8 kPa (0.61 kgf/cm², 8.67 psi)
EX300LCH-2		30 000 kg (66 200 lb)	55.9 kPa (0.57 kgf/cm², 8.11 psi)

Operating weight implies total weight of the basic machine plus 6 700 kg (14 800 lb) counterweight and triple grouser shoes, excluding front-end attachment.

EX300-2	22 600 kg (49 800 lb) with 600 mm (24") shoes.
EX300LC-2	24 200 kg (53 400 lb) with 800 mm (31") shoes.
EX300H-2	23 300 kg (51 400 lb) with 600 mm (24") shoes.
EX300LCH-2	24 000 kg (52 900 lb) with 600 mm (24") shoes.

Buckets

Capacity		Width		No. of teeth	Weight	Recommendation							
PCSA heaped	CECE heaped	Without side cutters	With side cutters			EX300-2			EX300LC-2			EX300H, LCH-2	
						2.66 m (8'9") arm	3.20 m (10'6") arm	4.00 m (13'1") arm	2.66 m (8'9") arm	3.20 m (10'6") arm	4.00 m (13'1") arm	3.20 m (10'6") H-arm	
1.15 m³ (1.50 cu yd)	1.00 m³	1 100 mm (43")	1 230 mm (48")	5	970 kg (2 150 lb)	⊙	⊙	⊙	⊙	⊙	⊙	⊙	
1.38 m³ (1.80 cu yd)	1.20 m³	1 280 mm (50")	1 410 mm (56")	5	1 080 kg (2 380 lb)	⊙	⊙	⊙	⊙	⊙	⊙	⊙	
1.62 m³ (2.12 cu yd)	1.40 m³	1 460 mm (57")	1 600 mm (63")	5	1 150 kg (2 540 lb)	⊙	⊙	—	⊙	⊙	⊙	⊙	
1.86 m³ (2.43 cu yd)	1.60 m³	1 640 mm (65")	—	5	1 070 kg (2 360 lb)	⊙	—	—	⊙	—	—	—	
*1.38 m³ (1.80 cu yd)	1.20 m³	1 280 mm (50")	1 410 mm (56")	5	1 290 kg (2 840 lb)	⊙	⊙	⊙	⊙	⊙	⊙	⊙	
*2.15 m³ (1.50 cu yd)	1.00 m³	1 160 mm (46")	—	5	1 260 kg (2 780 lb)	●	●	⊙	●	●	⊙	●	
*2.38 m³ (1.80 cu yd)	1.20 m³	—	1 340 mm (53")	5	1 230 kg (2 710 lb)	●	●	⊙	●	●	⊙	●	
Ripper bucket: 0.92 m³ (1.20 cu yd; PCSA heaped), 0.8 m³ (CECE heaped)		1 010 mm (40")	—	3	1 490 kg (3 290 lb)	●	●	—	●	●	—	●	
One-point ripper				1	850 kg (1 880 lb)	●	●	—	●	●	—	●	
Clamshell bucket: 0.60 m³ (0.78 cu yd; CECE heaped), Width 940 mm (37")				8	1 240 kg (2 730 lb)	⊙	⊙	⊙	⊙	⊙	⊙	⊙	

*1 Reinforced bucket

*2 Rock bucket

1.38 m³ (1.80 cu yd) Rock bucket equipped with side shroud.
EX300H-2 and EX300LCH-2 equipped with H-front.



SERVICE REFILL CAPACITIES

	liters	US gal	Imp gal
Fuel tank	510.0	134.7	112.2
Engine coolant	33.5	8.9	7.4
Engine oil	35.0	9.2	7.7
Pump drive	1.4	0.4	0.3
Swing mechanism	17.0	4.5	3.7
Travel final device (each side)	8.8	2.3	1.9
Hydraulic system	310.0	81.9	68.2
Hydraulic tank	154.0	40.7	33.9




BACKHOE ATTACHMENTS

Boom and arms are of all-welded, low-stress, full box-section design. 6.40 m (21'0") boom, 2.66 m (8'9"), 3.20 m (10'6") and 4.00 m (13'1") arms are available. Bucket is of all-welded, high-strength steel structure. Side clearance adjust mechanism provided on the bucket joint bracket.

EX300H-2/EX300LCH-2: The EX300-2 and EX300LCH-2 are heavy-duty model featuring a reinforced H-boom and H-arm, and durable 1.38 m³ (1.80 cu yd; PCSA heaped) Rock bucket, ensuring outstanding reliability as well as unusual productivity.

- ⊙ Suitable for materials with density of 2 000 kg/m³ (3 370 lb/cu yd) or less
- Suitable for materials with density of 1 600 kg/m³ (2 700 lb/cu yd) or less
- Slope finishing service
- Heavy-duty service
- Not recommended

DIMENSIONS

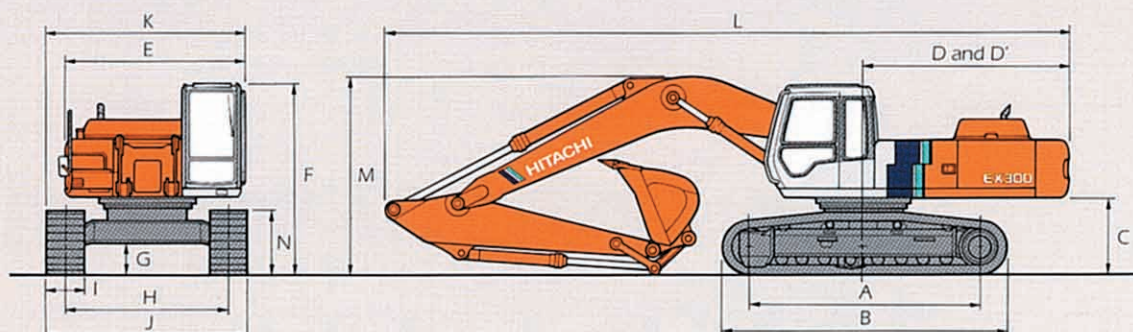


	EX300-2	EX300H-2	EX300LC-2	EX300LCH-2
A Distance between tumbler	3 710 mm (12'2")	3 710 mm (12'2")	4 010 mm (13'2")	4 010 mm (13'2")
B Undercarriage length	4 570 mm (15'0")	4 570 mm (15'0")	4 870 mm (16'0")	4 870 mm (16'0")
*C Counterweight clearance	1 175 mm (3'10")	1 175 mm (3'10")	1 175 mm (3'10")	1 175 mm (3'10")
D Rear-end swing radius	3 300 mm (10'10")	3 300 mm (10'10")	3 300 mm (10'10")	3 300 mm (10'10")
D' Rear-end length	3 290 mm (10'10")	3 290 mm (10'10")	3 290 mm (10'10")	3 290 mm (10'10")
E Overall width of upperstructure	2 880 mm (9'5")	2 880 mm (9'5")	2 880 mm (9'5")	2 880 mm (9'5")
F Overall height of cab	3 010 mm (9'11")	3 010 mm (9'11")	3 010 mm (9'11")	3 010 mm (9'11")
*G Min. ground clearance	500 mm (1'8")	500 mm (1'8")	500 mm (1'8")	500 mm (1'8")
H Track gauge	2 590 mm (8'6")	2 590 mm (8'6")	2 590 mm (8'6")	2 590 mm (8'6")
I Standard track shoe width	G600 mm (24")	G600 mm (24")	G800 mm (31")	G600 mm (24")
J Undercarriage width	3 190 mm (10'6")	3 190 mm (10'6")	3 390 mm (11'1")	3 190 mm (10'6")
K Overall width	3 190 mm (10'6")	3 190 mm (10'6")	3 390 mm (11'1")	3 190 mm (10'6")
L Overall length	With 2.66 m (8'9") arm With 3.20 m (10'6") arm With 4.00 m (13'1") arm	11 060 mm (36'3") 10 940 mm (35'11") 11 010 mm (36'1")	— **10 940 mm (35'11") —	11 060 mm (36'3") 10 940 mm (35'11") 11 010 mm (36'1")
M Overall height of boom	With 2.66 m (8'9") arm With 3.20 m (10'6") arm With 4.00 m (13'1") arm	3 410 mm (11'2") 3 200 mm (10'6") 3 490 mm (11'5")	— **3 200 mm (10'6") —	3 410 mm (11'2") 3 200 mm (10'6") 3 490 mm (11'5")
N Track height	1 000 mm (3'3")	1 000 mm (3'3")	1 000 mm (3'3")	1 000 mm (3'3")

* Excluding track shoe lug

** Equipped with H-Front

G: Triple grouser shoe

WORKING RANGES

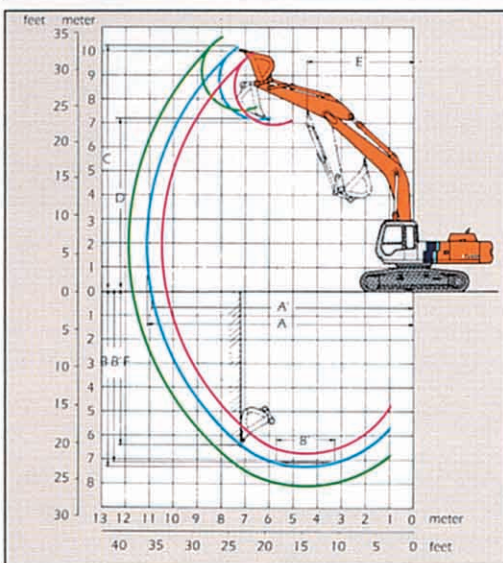


EX300-2/EX300LC-2, EX300H-2/EX300LCH-2

Arm length	EX300-2/EX300LC-2			EX300H-2/EX300LCH-2
	2.66 m (8'9")	3.20 m (10'6")	4.00 m (13'1")	6.40 m (21'0") H-boom 3.20 m (10'6") H-arm
A Max. digging reach	10 570 mm (34'8")	11 100 mm (36'5")	11 860 mm (38'11")	11 100 mm (36'5")
A' Max. digging reach (on ground)	10 360 mm (34'0")	10 900 mm (35'9")	11 680 mm (38'4")	10 900 mm (35'9")
B Max. digging depth	6 840 mm (22'5")	7 380 mm (24'3")	8 180 mm (26'10")	7 380 mm (24'3")
B' Max. digging depth (8' level)	6 650 mm (21'10")	7 220 mm (23'8")	8 050 mm (26'5")	7 220 mm (23'8")
C Max. cutting height	9 850 mm (32'4")	10 220 mm (33'6")	10 600 mm (34'9")	10 220 mm (33'6")
D Max. dumping height	6 810 mm (22'4")	7 120 mm (23'4")	7 490 mm (24'7")	7 120 mm (23'4")
E Min. swing radius	4 540 mm (14'11")	4 450 mm (14'7")	4 380 mm (14'4")	4 450 mm (14'7")
F Max. vertical wall	5 610 mm (18'5")	6 480 mm (21'3")	7 360 mm (24'2")	6 480 mm (21'3")
Bucket digging force	177.5 kN (18 100 kgf, 39 900 lbf)	177.5 kN (18 100 kgf, 39 900 lbf)	177.5 kN (18 100 kgf, 39 900 lbf)	177.5 kN (18 100 kgf, 39 900 lbf)
Arm digging force	161.8 kN (16 500 kgf, 36 400 lbf)	134.4 kN (13 700 kgf, 30 200 lbf)	115.7 kN (11 800 kgf, 26 000 lbf)	134.4 kN (13 700 kgf, 30 200 lbf)

Excluding track shoe lug

LIFTING CAPACITIES



A: Load radius
B: Load point height
C: Lifting capacity

METRIC MEASURE

EX300-2



Rating over-side or 360 degrees



Rating over-front

Unit: 1 000 kg (1 000 lb)

Conditions	Load point height m (ft in)	Load radius m (ft in)														At max. reach		
		4 (13'1")		5 (16'5")		6 (19'8")		7 (23'0")		8 (26'3")		9 (29'6")		10 (32'10")				m @ (ft in)
																		
Boom 6.40 m (21'0") Arm 2.66 m (8'9") Bucket PCSA: 1.38 m³ (1.80 cu yd) CECE: 1.20 m³ Shoes 600 mm (24")	6 (19'8")							*5.87 (12.9)	*5.87 (12.9)	4.77 (10.5)	*5.73 (12.6)					3.37 (7.43)	*4.69 (10.3)	9.54 (31'4")
	4 (13'1")			*9.53 (21.0)	*9.53 (21.0)	7.39 (16.3)	*7.87 (17.4)	5.73 (12.6)	*6.90 (15.2)	4.54 (10.0)	*6.28 (13.8)	3.64 (8.03)	5.35 (11.8)			2.89 (6.37)	4.33 (9.55)	10.1 (33'2")
	2 (6'7")					6.62 (14.6)	*9.89 (21.8)	5.25 (11.6)	7.77 (17.1)	4.23 (9.33)	6.27 (13.8)	3.45 (7.61)	5.15 (11.4)			2.74 (6.04)	4.17 (9.19)	10.1 (33'2")
	0 (Ground)			8.07 (17.8)	*9.37 (20.7)	6.21 (13.7)	9.45 (20.8)	4.92 (10.8)	7.42 (16.4)	4.00 (8.82)	6.02 (13.3)	3.30 (7.28)	4.99 (11.0)			2.89 (6.37)	4.40 (9.70)	9.74 (31'11")
	-2 (-6'7")	12.1 (26.7)	*12.2 (26.9)	8.26 (18.2)	*8.92 (19.7)	6.15 (13.6)	9.39 (20.7)	4.84 (10.7)	7.32 (16.1)	3.93 (8.67)	5.94 (13.1)					3.47 (7.65)	5.22 (11.5)	8.79 (28'10")
	-4 (-13'1")	*9.45 (20.8)	*9.45 (20.8)	8.51 (18.8)	*10.2 (22.5)	6.33 (14.0)	*8.74 (19.3)	4.98 (11.0)	*7.34 (16.2)									
	-5 (-16'5")	*9.13 (20.1)	*9.13 (20.1)	*8.20 (18.1)	*8.20 (18.1)	6.54 (14.4)	*6.96 (15.3)											

Boom 6.40 m (21'0") Arm 3.20 m (10'6") Bucket PCSA: 1.38 m³ (1.80 cu yd) CECE: 1.20 m³ Shoes 600 mm (24")	6 (19'8")									4.84 (10.7)	*5.19 (11.4)	3.79 (8.36)	*4.37 (9.64)			*2.92 (6.44)	*2.92 (6.44)	10.1 (33'2")
	4 (13'1")					*7.17 (15.8)	*7.17 (15.8)	5.82 (12.8)	*6.37 (14.0)	4.59 (10.1)	*5.85 (12.9)	3.66 (8.07)	5.38 (11.9)			2.58 (5.69)	*3.00 (6.62)	10.6 (34'9")
	2 (6'7")			8.82 (19.4)	*12.0 (26.5)	6.75 (14.9)	*9.34 (20.6)	5.31 (11.7)	*7.78 (17.2)	4.25 (9.37)	6.30 (13.9)	3.45 (7.61)	5.15 (11.4)	2.81 (6.20)	4.27 (9.42)	2.45 (5.40)	*3.24 (7.14)	10.7 (35'1")
	0 (Ground)	*7.39 (16.3)	*7.39 (16.3)	8.23 (18.1)	*10.6 (23.4)	6.24 (13.8)	9.50 (20.9)	4.93 (10.9)	7.43 (16.4)	3.98 (8.78)	6.01 (13.3)	3.26 (7.19)	4.96 (10.9)	2.70 (5.95)	4.15 (9.15)	2.57 (5.67)	*3.71 (8.18)	10.3 (33'10")
	-2 (-6'7")	*9.65 (21.3)	*9.65 (21.3)	8.17 (18.0)	*11.7 (25.8)	6.10 (13.5)	9.34 (20.6)	4.78 (10.5)	7.27 (16.0)	3.86 (8.51)	5.88 (13.0)	3.19 (7.03)	4.88 (10.8)			3.02 (6.66)	*4.58 (10.1)	9.41 (30'10")
	-4 (-13'1")	*10.9 (24.0)	*10.9 (24.0)	8.36 (18.4)	*11.0 (24.3)	6.21 (13.7)	*9.34 (20.6)	4.86 (10.7)	7.35 (16.2)							3.95 (8.71)	5.97 (13.2)	7.82 (25'8")
	-6 (-19'8")			*6.89 (15.2)	*6.89 (15.2)	*5.55 (12.2)	*5.55 (12.2)											
	-7 (-22'10")																	

Boom 6.40 m (21'0") Arm 4.00 m (13'1") Bucket PCSA: 1.15 m³ (1.50 cu yd) CECE: 1.00 m³ Shoes 600 mm (24")	6 (19'8")											4.00 (8.82)	*4.57 (10.1)	*2.85 (6.28)	*2.85 (6.28)	*2.31 (5.09)	*2.31 (5.09)	10.9 (35'9")
	4 (13'1")									4.78 (10.5)	*5.29 (11.7)	3.82 (8.42)	*5.02 (11.1)	3.08 (6.79)	4.55 (10.0)	2.30 (5.07)	*2.37 (5.23)	11.4 (37'5")
	2 (6'7")			9.32 (20.6)	*10.7 (23.6)	7.05 (15.5)	*8.50 (18.7)	5.51 (12.1)	*7.19 (15.9)	4.41 (9.72)	*6.33 (14.0)	3.57 (7.87)	5.28 (11.6)	2.91 (6.42)	4.38 (9.66)	2.19 (4.83)	*2.55 (5.62)	11.4 (37'5")
	0 (Ground)	*7.99 (17.6)	*7.99 (17.6)	8.41 (18.5)	*13.0 (28.7)	6.40 (14.1)	9.67 (21.3)	5.05 (11.1)	7.56 (16.7)	4.08 (9.00)	6.11 (13.5)	3.34 (7.36)	5.03 (11.1)	2.75 (6.06)	4.21 (9.28)	2.26 (4.98)	*2.90 (6.39)	11.1 (36'5")
	-2 (-6'7")	*8.76 (19.3)	*8.76 (19.3)	8.16 (18.0)	12.7 (28.0)	6.12 (13.5)	9.36 (20.6)	4.81 (10.6)	7.30 (16.1)	3.89 (8.58)	5.90 (13.0)	3.20 (7.06)	4.89 (10.8)	2.68 (5.91)	4.13 (9.11)	2.59 (5.71)	*3.53 (7.78)	10.3 (33'10")
	-4 (-13'1")	12.0 (26.5)	12.2 (26.9)	8.23 (18.1)	*12.1 (26.7)	6.13 (13.5)	9.37 (20.7)	4.80 (10.6)	7.29 (16.1)	3.88 (8.56)	5.90 (13.0)					3.23 (7.12)	4.92 (10.8)	8.88 (29'2")
	-6 (-19'8")	*10.7 (23.6)	*10.7 (23.6)	8.58 (18.9)	*9.08 (20.0)	6.40 (14.1)	*7.62 (16.8)	5.04 (11.1)	*6.17 (13.6)									
	-7 (-22'10")																	

EX300H-2

Unit: 1 000 kg (1 000 lb)

Conditions	Load point height m (ft in)	Load radius m (ft in)														At max. reach		
		4 (13'1")		5 (16'5")		6 (19'8")		7 (23'0")		8 (26'3")		9 (29'6")		10 (32'10")				
																		m @ (ft in)
Boom 6.40 m (21'0") H-boom Arm 3.20 m (10'6") H-arm Bucket PCSA: 1.38 m³ (1.80 cu yd) CECE: 1.20 m³ Rock bucket Shoes 600 mm (24")	6 (19'8")									4.74 (10.5)	*5.00 (11.0)	3.67 (8.09)	*4.23 (9.33)			*2.78 (6.13)	*2.78 (6.13)	10.1 (33'2")
	4 (13'1")					*6.97 (15.4)	*6.97 (15.4)	5.72 (12.6)	*6.17 (13.6)	4.47 (9.86)	*5.64 (12.4)	3.54 (7.81)	5.28 (11.6)			2.44 (5.38)	*2.86 (6.31)	10.6 (34'9")
	2 (6'7")			8.70 (19.2)	*11.8 (26.0)	6.63 (14.6)	*9.11 (20.1)	5.18 (11.4)	*7.56 (16.7)	4.12 (9.08)	6.19 (13.6)	3.32 (7.32)	5.04 (11.1)	2.67 (5.89)	4.15 (9.15)	2.31 (5.09)	*3.10 (6.84)	10.7 (35'1")
	0 (Ground)			8.09 (17.8)	*10.6 (23.4)	6.10 (13.5)	9.39 (20.7)	4.79 (10.6)	7.32 (16.1)	3.84 (8.47)	5.89 (13.0)	3.12 (6.88)	4.84 (10.7)	2.56 (5.64)	4.03 (8.89)	2.42 (5.34)	*3.57 (7.87)	10.3 (33'10")
	-2 (-6'1")	*9.64 (21.3)	*9.64 (21.3)	8.04 (17.7)	*11.7 (25.8)	5.96 (13.1)	9.23 (20.4)	4.64 (10.2)	7.16 (15.8)	3.72 (8.20)	5.76 (12.7)	3.05 (6.73)	4.76 (10.5)			2.88 (6.35)	*4.45 (9.81)	9.41 (30'10")
	-4 (-13'1")	*10.8 (23.8)	*10.8 (23.8)	8.23 (18.1)	*10.8 (23.8)	6.07 (13.4)	*9.10 (20.1)	4.72 (10.4)	7.25 (16.0)								3.81 (8.40)	5.86 (12.9)
	-6 (-19'8")			*6.66 (14.7)	*6.66 (14.7)	*5.32 (11.7)	*5.32 (11.7)											

- Notes:
1. Ratings are based on SAE J1097.
 2. Lifting capacity of the Super EX Series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
 3. The load point is a hook (not standard equipment) loaded on the back of the bucket.
 4. * Indicates load limited by hydraulic capacity.

METRIC MEASURE

EX300LC-2



Rating over-side or 360 degrees



Rating over-front

Unit: 1 000 kg (1 000 lb)

Conditions	Load point height	Load radius														At max. reach									
		m (ft in)																							
	4 (13'1")	5 (16'5")	6 (19'8")	7 (23'0")	8 (26'3")	9 (29'6")	10 (32'10")	4 (13'1")		5 (16'5")		6 (19'8")		7 (23'0")		8 (26'3")		9 (29'6")		10 (32'10")		m @ (ft in)			
Boom 6.40 m (21'0") Arm 2.66 m (8'9") Bucket PCSA: 1.38 m³ (1.80 cu yd) CECE: 1.20 m³ Shoes 800 mm (31")	6 (19'8")							*5.87 (12.9)	*5.87 (12.9)	5.11 (11.3)	*5.73 (12.6)												3.64 (8.03)	*4.69 (10.3)	9.54 (31'4")
	4 (13'1")			*9.53 (21.0)	*9.53 (21.0)	*7.87 (17.4)	*7.87 (17.4)	6.13 (13.5)	*6.90 (15.2)	4.88 (10.8)	*6.28 (13.8)	3.93 (8.67)	*5.90 (13.0)									3.14 (6.92)	*4.84 (10.7)	10.1 (33'2")	
	2 (6'7")					7.09 (15.6)	*9.89 (21.8)	5.64 (12.4)	*8.19 (18.1)	4.56 (10.1)	*7.11 (15.7)	3.74 (8.25)	6.15 (13.6)									2.99 (6.59)	5.01 (11.0)	10.1 (33'2")	
	0 (Ground)			8.67 (19.1)	*9.37 (20.7)	6.69 (14.8)	*10.8 (23.8)	5.32 (11.7)	8.88 (19.6)	4.33 (9.55)	7.20 (15.9)	3.59 (7.92)	5.98 (13.2)									3.15 (6.95)	5.29 (11.7)	9.74 (31'11")	
	-2 (-6'7")	*12.2 (26.9)	*12.2 (26.9)	8.87 (19.6)	*8.92 (19.7)	6.63 (14.6)	*10.5 (23.2)	5.23 (11.5)	8.79 (19.4)	4.26 (9.39)	7.13 (15.7)											3.77 (8.31)	*6.01 (13.3)	8.79 (28'10")	
	-4 (-13'1")	*9.45 (20.8)	*9.45 (20.8)	9.12 (20.1)	*10.2 (22.5)	6.81 (15.0)	*8.74 (19.3)	5.38 (11.9)	*7.34 (16.2)																
	-5 (-16'5")	*9.13 (20.1)	*9.13 (20.1)	*8.20 (18.1)	*8.20 (18.1)	*6.96 (15.3)	*6.96 (15.3)																		

Boom 6.40 m (21'0") Arm 3.20 m (10'6") Bucket PCSA: 1.38 m³ (1.80 cu yd) CECE: 1.20 m³ Shoes 800 mm (31")	6 (19'8")																	
	4 (13'1")																	
	2 (6'7")																	
	0 (Ground)																	
	-2 (-6'7")	*7.39 (16.3)	*7.39 (16.3)	8.85 (19.5)	*10.6 (23.4)	6.72 (14.8)	10.6 (23.4)	5.32 (11.7)	*8.78 (19.4)	4.32 (9.53)	7.19 (15.3)	3.55 (7.83)	5.95 (13.1)	2.96 (6.53)	5.01 (11.0)	2.81 (6.20)	*3.71 (8.18)	10.3 (33'10")
	-4 (-13'1")	*10.9 (24.0)	*10.9 (24.0)	8.97 (19.8)	*11.0 (24.3)	6.69 (14.8)	*9.34 (20.6)	5.25 (11.6)	*7.88 (17.4)									
	-6 (-19'8")			*6.89 (15.2)	*6.89 (15.2)	*5.55 (12.2)	*5.55 (12.2)											

Boom 6.40 m (21'0") Arm 4.00 m (13'1") Bucket PCSA: 1.15 m³ (1.50 cu yd) CECE: 1.00 m³ Shoes 800 mm (31")	6 (19'8")																	
	4 (13'1")																	
	2 (6'7")																	
	0 (Ground)																	
	-2 (-6'7")	*7.99 (17.6)	*7.99 (17.6)	9.02 (19.9)	*13.0 (28.7)	6.88 (15.2)	5.44 (12.0)	*8.46 (18.7)	4.41 (9.72)	*7.24 (16.0)	3.63 (8.00)	6.03 (13.3)	3.01 (6.64)	5.07 (11.2)	2.49 (5.49)	*2.90 (6.39)	11.1 (36'5")	
	-4 (-13'1")	*8.76 (19.3)	*8.76 (19.3)	8.77 (19.3)	*13.2 (29.1)	6.60 (14.6)	*10.8 (23.8)	5.20 (11.5)	8.77 (19.3)	4.22 (9.31)	7.09 (15.6)	3.49 (7.70)	5.88 (13.0)	2.93 (6.46)	4.98 (11.0)	2.84 (6.26)	*3.53 (7.78)	10.3 (33'10")
	-6 (-19'8")	*12.2 (26.9)	*12.2 (26.9)	8.84 (19.5)	*12.1 (26.7)	6.61 (14.6)	*10.1 (22.3)	5.19 (11.4)	*8.47 (18.7)	4.21 (9.28)	7.08 (15.6)							

EX300LCH-2

Unit: 1 000 kg (1 000 lb)

Conditions	Load point height	Load radius														m (ft in)			At max. reach		
		4 (13'1")		5 (16'5")		6 (19'8")		7 (23'0")		8 (26'3")		9 (29'6")		10 (32'10")							
	m (ft in)																	m @ (ft in)			
Boom 6.40 m (21'0") H-boom Arm 3.20 m (10'6") H-arm Bucket PCSA: 1.38 m³ (1.80 cu yd) CECE: 1.20 m³ Rock bucket Shoes 600 mm (24")	6 (19'8")									4.88 (10.8)	*5.00 (11.0)	3.80 (8.38)	*4.23 (9.33)			*2.78 (6.13)	*2.78 (6.13)	10.1 (33'2")			
	4 (13'1")					*6.97 (15.4)	*6.97 (15.4)	5.89 (13.0)	*6.17 (13.6)	4.62 (10.2)	*5.64 (12.4)	3.67 (8.09)	*5.29 (11.7)			2.55 (5.62)	*2.86 (6.31)	10.6 (34'9")			
	2 (6'7")					8.97 (19.8)	*11.8 (26.0)	6.84 (15.1)	*9.11 (20.1)	5.36 (11.8)	*7.56 (16.7)	4.27 (9.42)	*6.56 (14.5)	3.44 (7.59)	5.81 (12.8)	2.79 (6.15)	4.81 (10.6)	2.42 (5.34)	*3.10 (6.84)	10.7 (35'1")	
	0 (Ground)					8.36 (18.4)	*10.6 (23.4)	6.32 (13.9)	*10.4 (22.9)	4.97 (11.0)	*8.47 (18.7)	3.99 (8.80)	6.81 (15.0)	3.25 (7.17)	5.61 (12.4)	2.67 (5.89)	4.69 (10.3)	2.53 (5.58)	*3.57 (7.87)	10.3 (33'10")	
	-2 (-6'7")	*9.64 (21.3)	*9.64 (21.3)	8.31 (18.3)	*11.7 (25.8)	6.17 (13.6)	*10.4 (22.9)	4.82 (10.6)	8.30 (18.3)	3.87 (8.53)	6.68 (14.7)	3.18 (7.01)	5.53 (12.2)					3.00 (6.62)	*4.45 (9.81)	9.41 (30'10")	
	-4 (-13'1")	*10.8 (23.8)	*10.8 (23.8)	8.50 (18.7)	*10.8 (23.8)	6.28 (13.8)	*9.10 (20.1)	4.89 (10.8)	*7.64 (16.8)									3.96 (8.73)	*6.28 (13.8)	7.82 (25'8")	
	-6 (-19'8")			*6.66 (14.7)	*6.66 (14.7)	*5.32 (11.7)	*5.32 (11.7)														

- Notes:
1. Ratings are based on SAE J1097.
 2. Lifting capacity of the Super EX Series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
 3. The load point is a hook (not standard equipment) loaded on the back of the bucket.
 4. * Indicates load limited by hydraulic capacity.

ENGLISH MEASURE

EX300-2



Rating over-side or 360 degrees



Rating over-front

Unit: 1 000 lb

Conditions	Load point height ft in	Load radius														At max. reach		
		5'0"		10'0"		15'0"		20'0"		25'0"		30'0"		35'0"		ft in		
																		@ ft in
Boom 21'0" Arm 8'9" Bucket PCSA: 1.80 cu yd Shoes 24"	20'0"									11.6	*12.7					7.50	*10.3	31'2"
	15'0"							*15.9	*15.9	11.1	*13.7	7.85	11.5			6.58	9.82	32'9"
	10'0"							15.1	*19.2	10.5	*15.3	7.60	11.3			6.13	9.28	33'4"
	5'0"							14.0	21.0	9.93	14.8	7.30	11.0			6.06	9.23	33'1"
	0 (Ground)							13.4	20.3	9.52	14.3	7.08	10.7			6.37	9.70	31'11"
	-5'0"					21.0	*22.1	13.2	20.2	9.35	14.1	7.03	10.7			7.22	10.9	29'9"
	-10'0"			*32.2	*32.2	*20.1	*20.1	13.4	20.3	9.44	14.2					9.09	*12.9	26'3"
	-15'0"					*21.3	*21.3	13.8	*17.0									
Boom 21'0" Arm 10'6" Bucket PCSA: 1.80 cu yd Shoes 24"	20'0"									*11.5	*11.5	*7.48	*7.48			*6.43	*6.43	33'0"
	15'0"									11.3	*12.7	7.93	11.6			5.87	*6.52	34'6"
	10'0"					23.9	*25.7	15.4	*17.8	10.6	*14.4	7.62	11.3			5.49	*6.82	35'1"
	5'0"							14.2	*21.1	9.99	14.8	7.28	10.9			5.41	*7.35	34'10"
	0 (Ground)					*20.0	*20.0	13.4	20.4	9.50	14.3	7.00	10.6			5.66	*8.19	33'9"
	-5'0"			*13.8	*13.8	*19.3	*19.3	13.1	20.1	9.24	14.0	6.86	10.5			6.33	*9.53	31'9"
	-10'0"			*25.8	*25.8	21.1	*24.7	13.2	20.1	9.23	14.0					7.74	11.7	28'6"
	-15'0"			*18.7	*18.7	21.7	*23.9	13.5	*18.8	9.55	*13.9					*11.1	*11.1	23'6"
Boom 21'0" Arm 13'1" Bucket PCSA: 1.50 cu yd Shoes 24"	20'0"											8.53	*10.1			*5.10	*5.10	35'8"
	15'0"											8.30	*10.7			*5.16	*5.16	37'1"
	10'0"					*21.4	*21.4	*15.8	*15.8	11.1	*13.2	7.92	11.6	5.74	8.61	4.90	*5.38	37'7"
	5'0"					22.7	*28.7	14.8	*19.5	10.3	*15.2	7.51	11.2	5.54	8.48	4.82	*5.77	37'5"
	0 (Ground)					21.2	*27.5	13.8	20.8	9.73	14.6	7.15	10.8	5.36	8.29	4.99	*6.40	36'5"
	-5'0"			*15.2	*15.2	20.8	*26.1	13.2	20.2	9.34	14.1	6.91	10.6			5.47	*7.37	34'6"
	-10'0"	*18.3	*18.3	*20.8	*20.8	20.9	*28.6	13.1	20.0	9.20	14.0	6.85	10.5			6.45	*8.97	31'8"
	-15'0"			*21.6	*21.6	21.2	*27.3	13.3	20.2	9.32	14.1					8.51	*11.2	27'3"
	-20'0"			*26.6	*26.6	*21.0	*21.0	13.8	*16.1									

EX300H-2

Unit: 1 000 lb

Conditions	Load point height ft in	Load radius														At max. reach		
		5'0"		10'0"		15'0"		20'0"		25'0"		30'0"		35'0"		ft in		
																		@ ft in
Boom 21'0" H-boom Arm 10'6" H-arm Bucket PCSA: 1.80 cu yd Rock bucket Shoes 24"	20'0"									*11.0	*11.0	*7.19	*7.19			*6.12	*6.12	33'0"
	15'0"									11.0	*12.2	7.66	*11.3			5.57	*6.21	34'6"
	10'0"					23.7	*25.2	15.2	*17.4	10.4	*14.0	7.33	11.1			5.18	*6.51	35'1"
	5'0"							13.9	*20.6	9.70	14.6	6.98	10.7			5.10	*7.04	34'10"
	0 (Ground)					*20.0	*20.0	13.1	20.2	9.20	14.1	6.69	10.4			5.34	*7.88	33'9"
	-5'0"			*13.4	*13.4	*19.2	*19.2	12.8	19.8	8.93	13.8	6.55	10.2			6.02	*9.22	31'9"
	-10'0"			*25.8	*25.8	20.8	*24.6	12.9	19.9	8.93	13.8					7.44	11.4	28'6"
	-15'0"			*18.6	*18.6	21.4	*23.4	13.2	*18.2	9.26	*13.4					*10.6	*10.6	23'6"


Notes: 1. Ratings are based on SAE J1097.

2. Lifting capacity of the Super EX Series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.

3. The load point is a hook (not standard equipment) loaded on the back of the bucket.

4. * Indicates load limited by hydraulic capacity.

LIFTING CAPACITIES



A: Load radius
B: Load point height
C: Lifting capacity

ENGLISH MEASURE

EX300LC-2

Rating over-side or 360 degrees Rating over-front Unit: 1 000 lb

Conditions	Load point height ft in	Load radius														At max. reach		
		5'0"		10'0"		15'0"		20'0"		25'0"		30'0"		35'0"		ft in		
		Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	@ ft in
Boom 21'0" Arm 8'9" Bucket PCSA: 1.80 cu yd Shoes 31"	20'0"									12.4	*12.7					8.10	*10.3	31'2"
	15'0"							*15.9	*15.9	11.9	*13.7	8.48	*12.8			7.15	*10.5	32'9"
	10'0"							16.1	*19.2	11.3	*15.3	8.23	*13.3			6.69	*11.0	33'4"
	5'0"							15.0	*22.1	10.7	*16.9	7.93	13.1			6.62	11.1	33'1"
	0 (Ground)							14.4	*23.4	10.3	17.1	7.71	12.9			6.95	11.7	31'11"
	-5'0"					*22.1	*22.1	14.3	*23.1	10.1	16.9	7.66	12.8			7.85	13.1	29'9"
	-10'0"			*32.2	*32.2	*20.1	*20.1	14.4	*21.2	10.2	*16.4					9.82	*12.9	26'3"
	-15'0"					*21.3	*21.3	14.9	*17.0									
Boom 21'0" Arm 10'6" Bucket PCSA: 1.80 cu yd Shoes 31"	20'0"									*11.5	*11.5	*7.48	*7.48			*6.43	*6.43	33'0"
	15'0"									12.1	*12.7	8.56	*11.8			6.40	*6.52	34'6"
	10'0"					25.4	*25.7	16.4	*17.8	11.4	*14.4	8.25	*12.6			6.01	*6.82	35'1"
	5'0"							15.2	*21.1	10.8	*16.2	7.90	13.1			5.94	*7.35	34'10"
	0 (Ground)					*20.0	*20.0	14.5	*23.0	10.3	17.1	7.62	12.8			6.20	*8.19	33'9"
	-5'0"			*13.8	*13.8	*19.3	*19.3	14.2	*23.3	10.0	16.9	7.49	12.6			6.91	*9.53	31'9"
	-10'0"			*25.8	*25.8	22.7	*24.7	14.2	*22.0	10.0	16.8					8.41	*11.8	28'6"
	-15'0"			*18.7	*18.7	23.2	*23.9	14.5	*18.8	10.3	*13.9					*11.1	*11.1	23'6"
Boom 21'0" Arm 13'1" Bucket PCSA: 1.50 cu yd Shoes 31"	20'0"											9.16	*10.1			*5.10	*5.10	35'8"
	15'0"											8.93	*10.7			*5.16	*5.16	37'1"
	10'0"					*21.4	*21.4	*15.8	*15.8	11.9	*13.2	8.55	*11.7	6.27	8.61	*5.38	*5.38	37'7"
	5'0"					24.2	*28.7	15.8	*19.5	11.1	*15.2	8.14	*12.8	6.07	10.1	5.31	*5.77	37'5"
	0 (Ground)					22.8	*27.5	14.8	*22.1	10.5	*16.9	7.78	13.0	5.89	9.81	5.49	*6.40	36'5"
	-5'0"			*15.2	*15.2	22.3	*26.1	14.3	*23.3	10.1	17.0	7.54	12.7			6.00	*7.37	34'6"
	-10'0"	*18.3	*18.3	*20.8	*20.8	22.4	*28.6	14.1	*22.9	9.98	16.8	7.48	12.6			7.04	*8.97	31'8"
	-15'0"			*21.6	*21.6	22.8	*27.3	14.3	*20.8	10.1	*16.0					9.21	*11.2	27'3"
	-20'0"			*26.6	*26.6	*21.0	*21.0	14.8	*16.1									

EX300LCH-2

Unit: 1 000 lb

Conditions	Load point height ft in	Load radius														At max. reach		
		5'0"		10'0"		15'0"		20'0"		25'0"		30'0"		35'0"		ft in		
		Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	@ ft in
Boom 21'0" H-boom Arm 10'6" H-arm Bucket PCSA: 1.80 cu yd Rock bucket Shoes 24"	20'0"									*11.0	*11.0	*7.19	*7.19			*6.12	*6.12	33'0"
	15'0"									11.4	*12.2	7.93	*11.3			5.81	*6.21	34'6"
	10'0"					24.4	*25.2	15.6	*17.4	10.7	*14.0	7.61	*12.1			5.41	*6.51	35'1"
	5'0"							14.4	*20.6	10.0	*15.7	7.26	12.3			5.33	*7.04	34'10"
	0 (Ground)					*20.0	*20.0	13.6	*22.4	9.54	16.2	6.97	12.0			5.59	*7.88	33'9"
	-5'0"			*13.4	*13.4	*19.2	*19.2	13.3	*22.7	9.28	15.9	6.83	11.8			6.28	*9.22	31'9"
	-10'0"			*25.8	*25.8	21.5	*24.6	13.3	*21.4	9.27	15.9					7.74	*11.5	28'6"
	-15'0"			*18.6	*18.6	22.1	*23.4	13.7	*18.2	9.61	*13.4					*10.6	*10.6	23'6"

Notes: 1. Ratings are based on SAE J1097.

2. Lifting capacity of the Super EX Series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.

3. The load point is a hook (not standard equipment) loaded on the back of the bucket.
4. * Indicates load limited by hydraulic capacity.

• These specifications are subject to change without notice.



STANDARD EQUIPMENT

Standard equipment may vary by country, so please consult your Hitachi dealer for details.

ENGINE

- 30 A alternator
- Dry-type air filter with evacuator valve
- Cartridge-type engine oil filter
- Cartridge-type engine oil bypass filter
- Catridge type heavy-duty fuel filter
- Radiator & oil cooler with dustproof net
- Radiator reserve tank
- Fan guard
- Isolation-mounted engine
- Auto-idling system

HYDRAULIC SYSTEM

- ETS
- E-P Control system (Power mode selector)
- OHS
- FPS
- Hydraulic warm-up control system for Hydraulic oil
- Quick warm-up system for pilot circuit
- Swing cushion valve
- Accumulator for pilot circuit
- Control valve with main relief valve
- Extra port for control valve
- Suction filter

- Full-flow filter

CAB

All-weather sound-suppressed steel cab equipped with reinforced, tinted (bronze color) glass windows, openable front windows-upper with assist spring, and lower and both side windows with intermittent windshield wipers, front window washer, curved rear window, adjustable suspension seat with armrests, footrest, electric double horn, auto-tuning radio with digital clock, auto-idle switch, cigarette lighter, ashtray, parcel pocket, rear tray, floor mat, heater, and pilot control shut-off lever. Front glass scatter preventive film sheet for Heavy-duty type

MONITOR SYSTEM

- Meters:
Hourmeter, engine coolant temperature gauge and fuel meter.
- Warning lamps:
Alternator charge, engine oil pressure, engine overheat, air cleaner clog, minimum fuel level.

- Pilot lamps:
Engine preheat, engine oil level, engine coolant level and hydraulic oil level
- Alarm buzzers:
Engine oil pressure and engine overheat.

LIGHTS

- 3 working lights and 1 cab light

UPPERSTRUCTURE

- Full undercover
- 6 700 kg (14 800 lb) counter-weight
- Fuel level gauge
- Hydraulic oil level gauge
- Large tool box
- Utility space
- Rearview mirror
- Swing parking brake
- Reinforced full undercover for Heavy-duty type

UNDERCARRIAGE

- Travel parking brake
- Travel motor covers
- Track guards and hydraulic track adjuster
- Bolt-on sprocket
- Upper roller & Lower roller

- Reinforced track links with pin seals
- 600 mm (24") Triple grouser shoe: EX300-2, EX300H-2 and EX300LCH-2
- 800 mm (31") Triple grouser shoe: EX300LC-2
- Reinforced track guard for Heavy-duty type

FRONT ATTACHMENTS

- Bucket clearance adjust mechanism
- Rugged, monolithically cast bucket link A
- Centralized lubrication system
- Dirt seals on all bucket pins
- 3.20 m (10'6") arm
- 1.38 m³ (1.80 cu yd; PCSA heaped) bucket
- H-boom 6.40 m (21'0") & H-Arm 3.20 m (10'6") for Heavy-duty type
- 1.38 m³ (1.80 cu yd; PCSA heaped) Rock bucket for Heavy-duty type

MISCELLANEOUS

- Standard tool kit
- Lockable machine covers
- Fuel filling cap
- Non-slip tapes and handrails.




OPTIONAL EQUIPMENT

Optional equipments may vary by country, so please consult your Hitachi dealer for details.

- Air conditioner
- Defroster
- Headguard
- Seat belt
- Multi selection lever with rotary valve
- Electric fuel refilling pump
- Swing motion alarm device with lamps
- Travel motion alarm device
- Hose rupture valves

Type of Bucket

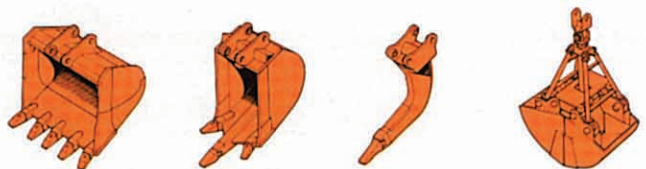

Rock bucket

Ripper bucket

One-point ripper

Clamshell bucket

Type of shoe



Triple grouser shoe
800 mm (31")

Flat shoe
600 mm (24")

Triangular shoe
910 mm (36")

These specifications are subject to change without notice.
Illustrations may or may not include optional equipment and accessories,
and all standard equipment.

Hitachi Construction Machinery Co., Ltd.

Head Office: Nippon Bldg., 6-2, 2-chome, Ohtemachi,
Chiyoda-ku, Tokyo 100, Japan

Telephone: Tokyo (03) 3245-6377

Facsimile: Tokyo (03) 3246-2609

Telex: J 32539 HITACONJ

Cable Address: "TOKHITACHIKENKI"